DRAGONFLY LED Sports Floodlighting 960W 1200W

3

High performance lighting ideal for sports fields and stadiums,Each module can be adjustable with the marking scale to adjust the angle accurately,which help achieve the perfect uniformity illumination.

DIE CE CE CE CE CE CE LM79 LECEE LK08 spray






HIGH POWER LED FLOODLIGHT FOR SPORTS LIGHTING APPLICATIONS

•Unique quality of light with flickerfree operation suitable for HDTV broadcasting and Super Slow Motion

•Flexible optical system optimising lighting distributions for best in class results

•Compact and low weight for minimal structural costs

•Fully controllable solution enabling instant lighting, stepped illumination levels and event lighting with dynamic lighting scenarios

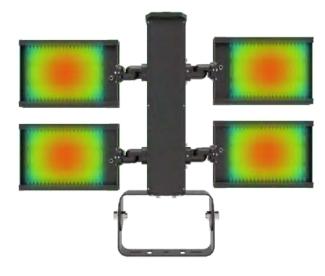

Light weight

The advantage of aluminum fin heat dissipation is that the weight is reduced by about 30% to 40%. This is an advantage compared to traditional die-cast aluminum lamps for sports field lighting installations. To reduce the loading weight of the pole and to reduce the workload of the installer.


Floded fin

This allows you to improve thermal performance while adding a minimal amount of weight.Folded Fin heatsinks use a continuous strip of aluminum sheet metal affixed to an aluminum base plate. The advantage of Folded Fin as opposed to extruded heatsinks is higher aspect ratios and thinner fins, thus increasing surface area and lowering thermal resistance.The stamping riveting process is not welded so that it make the auminum fins fit more closely with the aluminum board, creating more surface touching area from led chips heat to the heat sink and contributing to faster heat dissipation.

Surface Treatments

The surface of the heat sink is environmentally friendly and recyclable by powder electrostatic spraying process, which is resistant to corrosion, oxidation and aging.



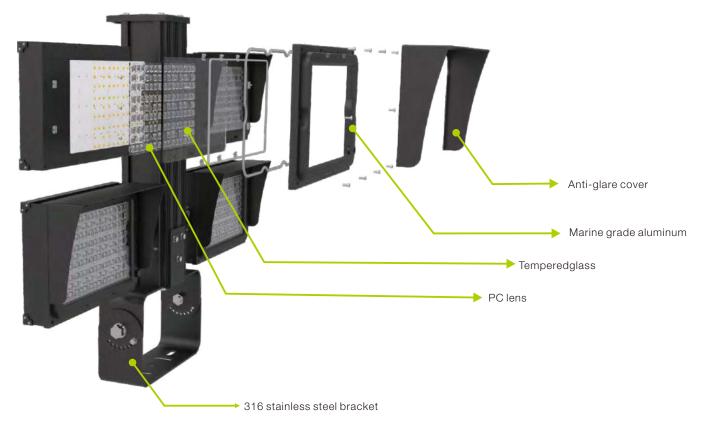



Product DRAGONFY LED Sports Floodlight

Electrical Characteristics (Luminaire)

Power Consumption

Total Harmonic Distortion

Dimming Function

Replacement

Input Volt Frequency Range Power Factor

Model	LSDHM-960W-LV(XXK)	LSDHM-1200W-LV(XXK)
System Efficacy	165LM/W±3%	155LM/W±3%
Luminous Flux (Photometered)	158,400Lm	186,000Lm
Light Source	Lumileds 5050	
Driver	Meanwell ELG-240-48A*4	Meanwell ELGC-300-H-A*4
Distribution Type	10° / 20° / 60° / 90°10°(P50-P8)/135*60°(P50)/97*47°(TypelV)	
сст	30K - 3000K 50K - 5000K 40K - 4000K 57K - 5700K	
CRI	>70 (Optional with CRI>90)	
Surge protection device	6KV	

960W Typical

>0.95 / 230VAC

< 20%

DALI Optional

1200W Typical

Product DRAGONFY LED Sports Floodlight

Model	LSDHM-960W-LV(XXK)	LSDHM-1200W-LV(XXK)
Weight/Packaging		
Luminaire Weight	30.4Kg	32Kg
Packaging Dimensions	1pc / 125*100*25cm	
Packaged Weight	33.9Kg	35.5Kg

Certficates (Safety Standards)

ETL		√
DLC(Standard)		√
ENEC	IEC/EN60598-2-3	√
СВ	IEC/EN60598-2-3 IEC/EN60598-1 IEC/EN62778	√
TUV CE-LVD		√
Australian deviation		√
TUV CE-EMC	EN55014	
	EN61547	√
	EN61000-3-2	
	EN61000-3-3	
SAA		√
TUV IK08		√
Salt Spray Test	24H	√
IP66	By ENEC	√
Flammability test	By ENEC	√
Lm79		√
Lm80		√

Environmental IP Rating IP66 Impact Rating lk08 Salt Spray Tested Operating Temp. Range -30° ~ 122°F (-30° ~ 45°C) Operating Humidity Thermal Management Type Natural air cooling Floded Aluminium fin L70B10 50,000hours Expected Lifespan ADC-12 Aluminium + Marine grade aluminum Material Composition (Body) Material Composition (Optics) PMMA (UV Resistance) Material Composition (Cover) Extra clear tempered glass protect Mounting/Bracket Type Post-top position,Side-entry position Modules Rotatable 360°

2500W HPS MH


Warranty

Warranty

5 years warranty 7 years extended warranty available


DIMENSIONS DRAGONFLY LED Sports Floodlighting 960W 1200W


Height:	35.86 in (911 mm)	Length: 7.13 i	n (181.2mm)
Width:	44.29 in (1125.1mm)	Luminaire Weiç	ht: 30.4kg(960W) 32Kg(1200W)

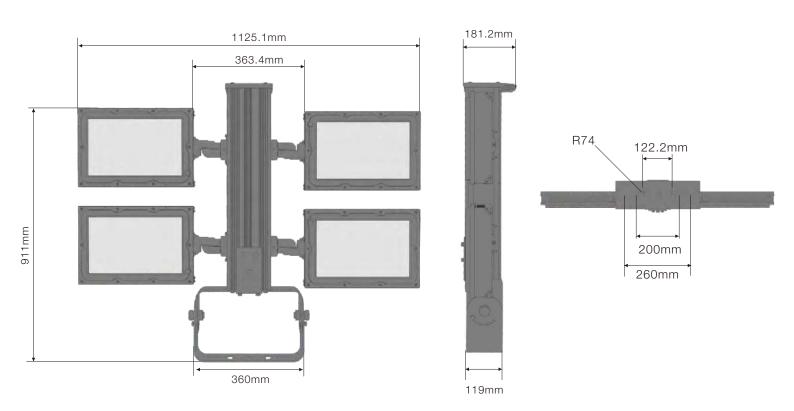


LED Modules rotatable

modules are 360° rotatable,arm comes with scale plate

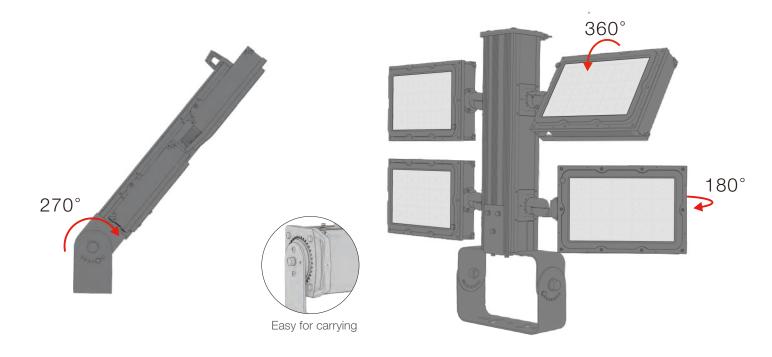

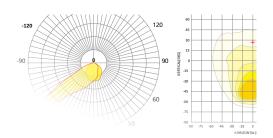

Dg

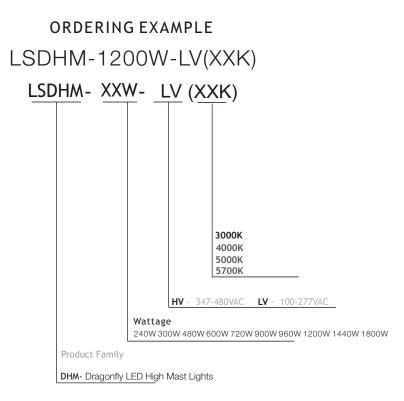

Options



▲ IRON bracket The bracket is optional to use by iron materials



Anti-glare cover

Black color and white color are optional (the reflective rate of white color will be better)



▲ SPD Optional with 10KV or 20KV SPD



▲ Meanwell HLG driver It's optional with Meanwell HLG driver