LED High Mast Lights 400W 480W

► FEATURES & BENEFITS

•IP65 rated LED floodlight

- •Rotatable modules offering maximum customisation
- •Heavy duty stirrup mounting bracket
- •Multiple optics available
- •Can be installed as a floodlight or high bay
- •With illumination equivalent to 800 watt and 1000W metal halide fixtures
- you'll enjoy an "instant-on, flicker-free" cold start, and industry-leading 155-160Lm/W.
- Protractor scale for easier aiming
- •50,000-hour operating life means years of maintenancefree operation.
- •Unique design extracts heat from the light source, thereby extending component life and ultimately prolonging the useful life of the fixture.
- •Lightweight design provides easy retrofitting of existing HID installations,along with quick mounting o all new installations.







LED HIGH MAST LIGHT 400W 480W





DIMENSIONS

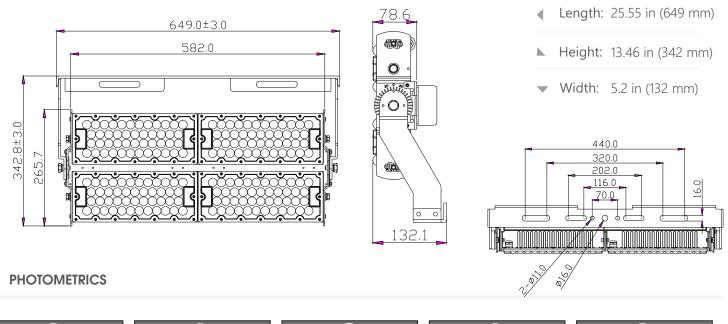

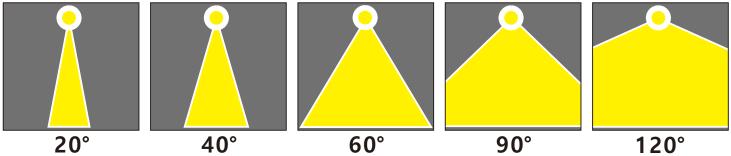



All Applications

- Uniformity and light quality
- Light pollution and spillage
- Controls

Baseball, Softball

- High levels of illumination
- Lighted from all sides
- Reducing glare

Harbors, Wharfs

- Pole location (primarily sidelines)
- Pole quantity
- Number of fixtures per pole

Soccer, Lacrosse, Mixed Use

- Pole location
- Pole quantity
- Number of fixtures per pole

Basketball, Tennis

- Floodlight, or area-style fixtures
- Court configuration (grouping)Court access

- Rotatable module
- 2 ► Replaceable optical lens
- 3 ► Protractor scale for easier aiming
- 4 Lengthened heavy duty mounting bracket allowing for 360° rotation
- Salt spray resistant, corrosive resistant, processed with dedicated treatments on the heat sink and other components, these fixtures can withstand corrosive and salt intensive environments.





OPTICAL SPECS	LSHM-B400W-LV(XXK)	LSHM-B480W-LV(XXK)
Efficency:	Up to 160 Lm/W±3%	Up to 155 Lm/W±3%
Lumen:	64,000 Lumens	74,400 Lumens
Color Temp:	3000K / 4000K / 5000K / 5700K	
Light Source:	Lumileds 5050	
Beam Angle:	20° / 40° / 60° / 90° / 140*100°/ Milky PC 120°	

ELECTRICAL SPECS

Wattage:	400 Watt	480 Watt
Input Voltage:	100-277VAC	
Power Frequency:	50/60 Hz	
Driver:	Meanwell 2xELG-240-48A	
Dimming:	Dimmable / Non-dimmable	

OTHER DETAILS

Fixture Material:	Marine grade aluminum
IP Rating:	IP65 (TUV report available)
Module rotatable:	Module rotatable up & down 15°
Lifespan:	>50,000 Hours
Dimensions:	25.55 x 14.25 x 5.2 in (649 x 342 x 132mm)
Certficates:	TUV ,CE ,SAA ,LM79, LM80, ISTMT, LCP



LED HIGH MAST LIGHT



APPLICATION

- ▶Outdoor lighting
 ▶Security lighting
 ▶Industrial lighting
 ▶Construction site lighting
- ▶ Highmast lighting

- ADJUSTABLE MOUNT



Round installation plate



