


The photograph may not match the reference exactly. Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

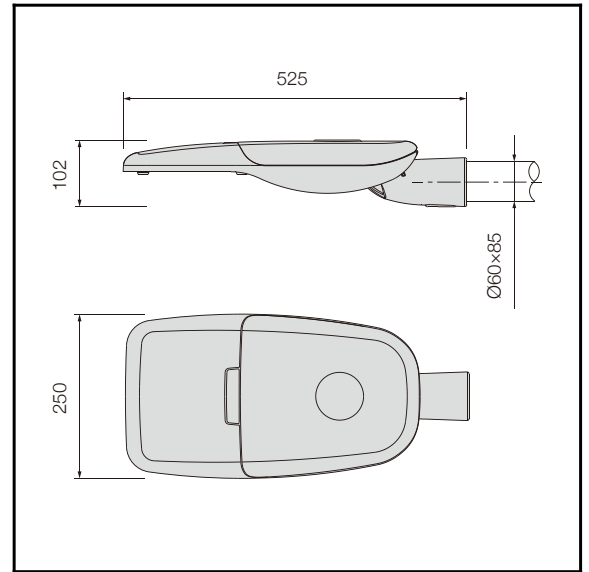


Type:	Street Lighting			
IP Protection degrees:	IP66			
IK Protection degrees:	IK10			
Light source 1:	12xLED 15W Warm White - 4000K 1600lm ^(N) CRI 70	16xLED 20W Warm White - 4000K 2140lm ^(N) CRI 70	16xLED 30W Warm White - 4000K 2930lm ^(N) CRI 70	24xLED 40W Warm White - 4000K 3800lm ^(N) CRI 70
Total power consumption (W):	15.1	20.3	30.1	40.1
Voltage / Frequency:	100-240V/50-60Hz			
Warranty (Years):	5			
Units per box:	1			
Net Weight (Kg):	4.5/4.7	5.2/6.1	5.2/6.1	5.3/6.2

MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

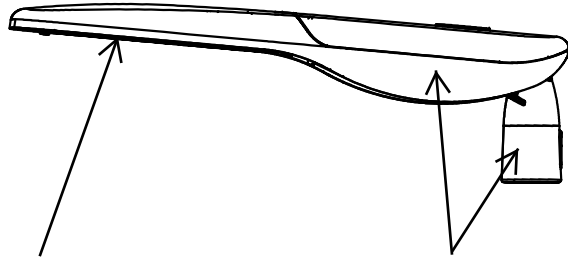

Ultra-white glass


High purity aluminum

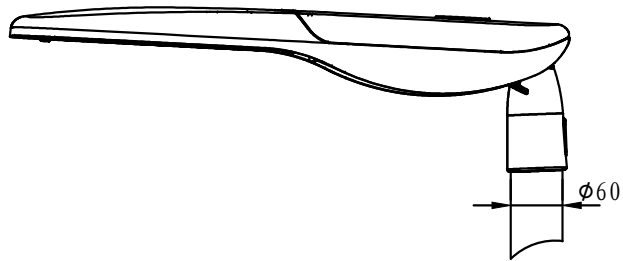


installation template

OUTDOOR


①

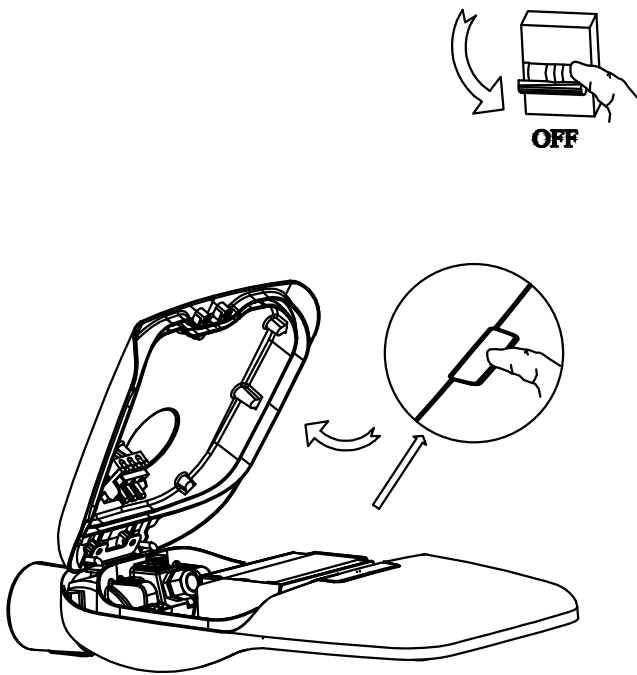

②

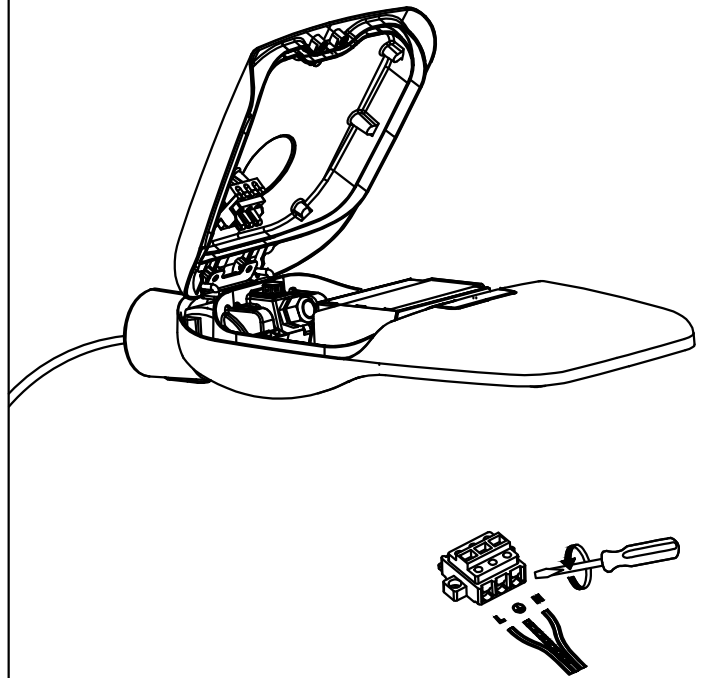

③

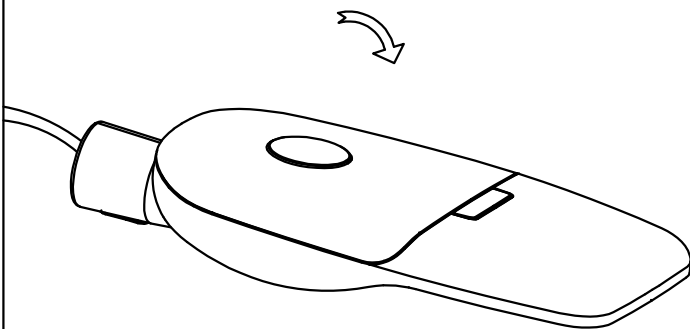

④

