




The photograph may not match the reference exactly. Please read the product description to identify the finish.

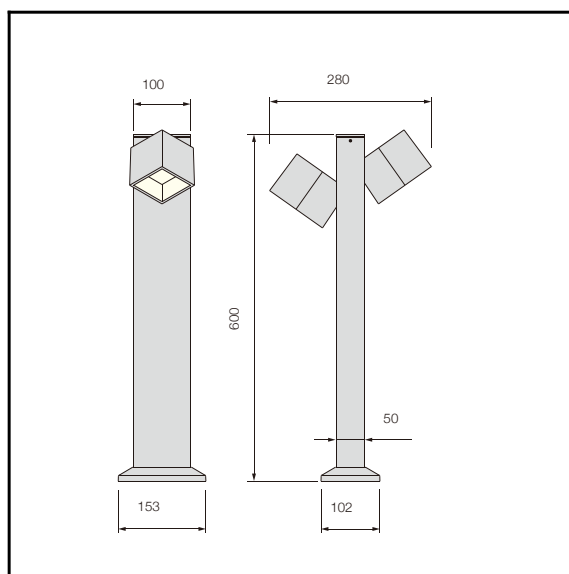

**C-12D**

**TECHNICAL CHARACTERISTICS**



Product Model:	C-12D	
IP Protection degrees:	IP65	
IK Protection degrees:	IK08	
Light source:	12 x LED CREE	20 x SMD 3030
Total power consumption:	15W	18W
Luminous Flux:	900-1050Lm	1440-1620Lm
Luminous efficiency:	60-70Lm/w	80-90Lm/w
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available	
Voltage/Frequency:	100-240V/50-60Hz	
Warranty(Years):	3	
Units per box:	2	
Net Weight(Kg)	2.8	



**MATERIALS / FINISHES**

<b>Structure material:</b> High purity aluminium	<b>aiffuser material:</b> Glass
<b>Structure finish:</b> Black	<b>Diffuser finish:</b> Matt

**GEAR**

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

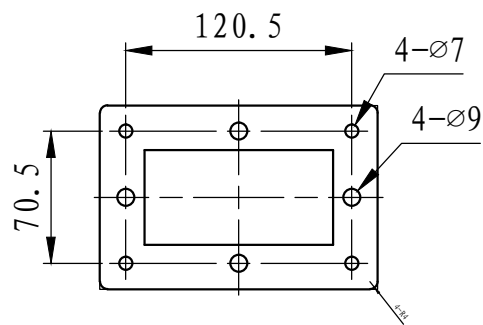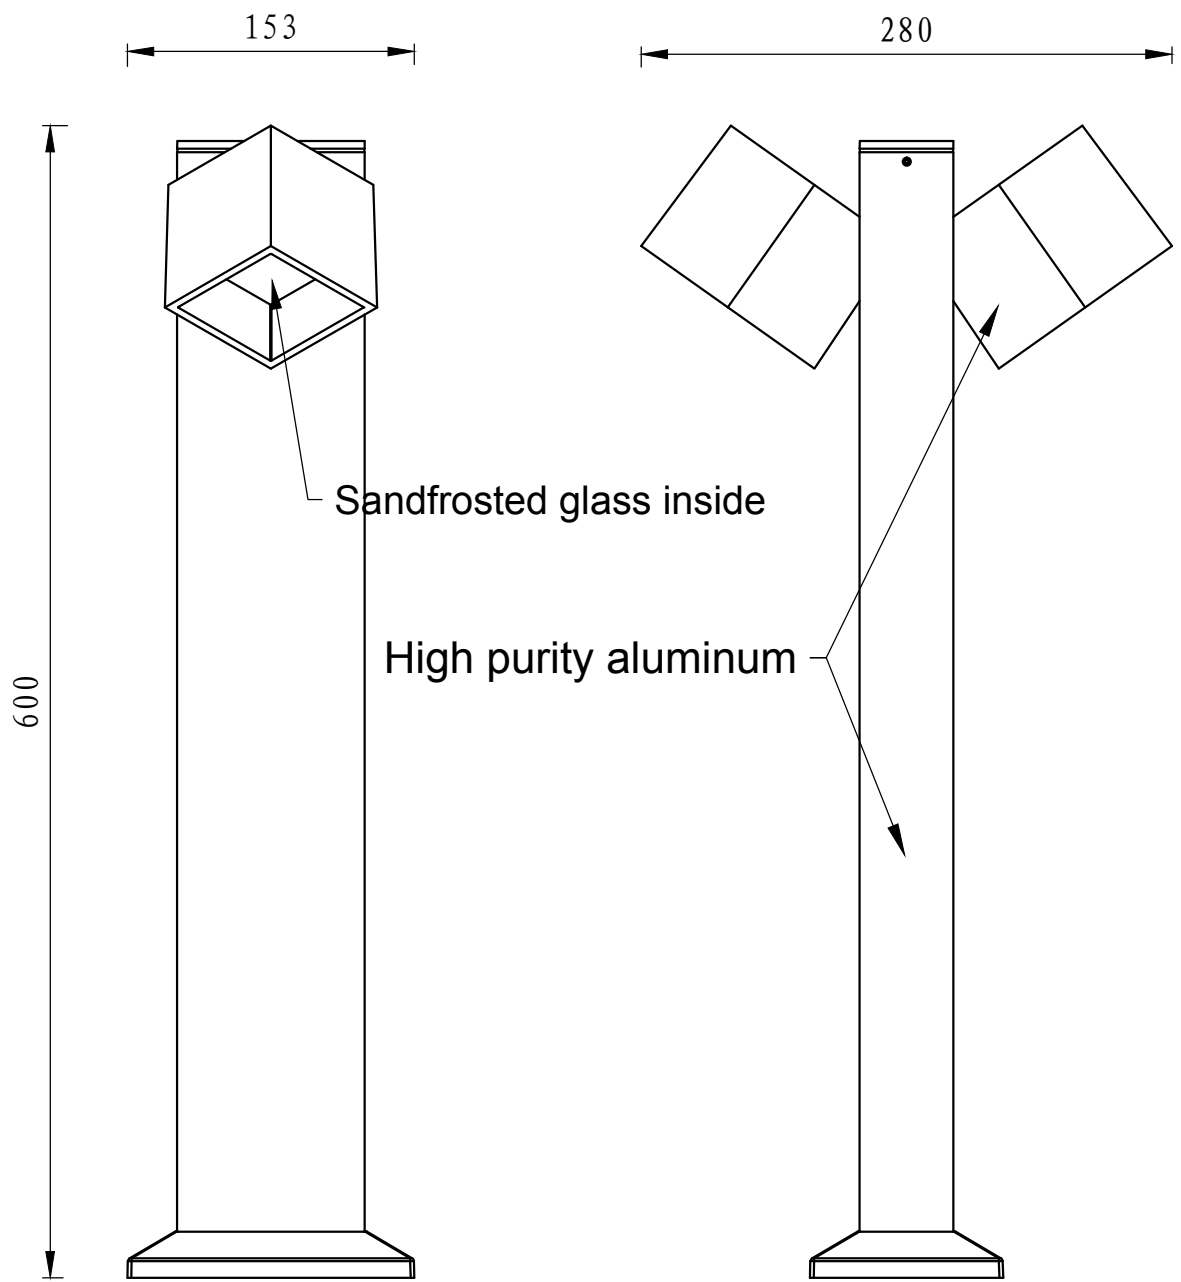

Installation template